S. NO - 207 (P)+208 (P), HADAPSAR

F.S.I. & NON F.S.I. STATEMENT

BLDG. HEIGHT	NO OF TENEMENTS 0 TO 30	80 TO 150	ABOVE 150	TOTAL	BUILDING NAME	PROPOSED B/UP AREA COMMERCIAL	RESIDENTIAL
116.06 M.	--	154	7	161	TOWER-3		24,288.41
116.06 M.	--	154	7	161	TOWER-4		21,091.88
80.30 M.	--	90	4	94	TOWER-5	---	14,441.20
20.55 M.	--	--	-	--	TOWER-6		---
83.50 M.	--	110	-	110	TOWER-7		14,590.39
34.95 M.	198	--	-	198	MHADA		8,368.13
--	--	--	-	--	SERVICES		---
TOTAL	198	508	18	724	TOTAL	---	82,780.01

Built UP FSI for Tower 5+6+7 =29031.59


NON-F.S.I. STATEMENT

PODIUM PARKING-1 FLOOR	PODIUM PARKING-2 FLOOR	PODIUM PARKING-3 FLOOR	PODIUM PARKING-4 FLOOR	PODIUM PARKING-5 FLOOR	AMENITY FLOOR	LIFT SLAB AREA	STAIRCASE TOP SLAB AREA	O.H.W.T. TOP SLAB AREA	O.H.W.T. BOTTOM SLAB AREA	PUMP ROOM BOTTOM SLAB AREA	PUMP ROOM TOP/FIRE TANK BOTTOM	FIRE TANK TOP SLAB AREA	REFUGE AREA	TERRACE AREA	S.T.P.+O.W.C. TRANSFORMER	U.G.W.T. AREA	CLUB HOUSE+ MULTIPURPOSE HALL	SWIMMING POOL	TOTAL NON F.S.I.
2466.86	2634.74	2634.74	2634.74	2634.74	1875.35	62.12	--	58.56	58.56	--	--	--	266.98	746.60					16,073.99
2307.24	2387.85	2387.85	2387.85	2387.85	1588.03	69.86	--	63.97	63.97	40.31	40.31	40.31	202.04	857.36	---	---	---	---	14,824.80
2200.56	2466.68	2466.68	2466.68	2466.68	---	69.86	63.97	--	--	--	--	--	--	1893.91					14,095.02
1860.39	2041.22	2041.22	2041.22	2041.22	1353.74	62.12	--	58.56	58.56	34.69	34.69	34.69	152.56	747.60					10,521.26
---	---	---	---	---	---	37.70	--	40.18	40.18	--			37.73	758.47					914.26
---	---	---	---	---	---	---	---	--	--	--	--	--	---	---	980.73	617.21	399.78	267.51	2,265.23
9727.09	12,102.09	12,282.92	12,282.92	12,282.92	6518.32	371.52	63.97	285.24	285.24	75.00	75.00	75.00	1012.88	5861.30	980.73	617.21	399.78	267.51	75,566.64

TOTAL NON F.S.I.=75,566.64 SQ.M.

TOTAL F.S.I.+NON F.S.I.=82,780.01+75,566.64=1,58,346.65 SQ.M.

PROPOSED SITE



SITE PLAN

STAMP OF APPROVAL 1/69

LAYOUT-TOWER 3,4,5,6,7 & MHADA BUILDING

APPROVED SUBJECT TO CONDITIONS
APPROVED UNDER COMMENCEMENT CERTIFICATE NO. CC/2800/25 दिनांक दिनांकी दि-16/10/25

Building Inspector — Deputy Engineer P.M.C

POONA MUNICIPAL CORPORATION BUILDING CONTROL DEPARTMENT APPROVED POONA

TOWER-3
PARKING CALCULATION-RESIDENTIAL (As updated upto 30th January,2025)

TYPE	CARPET AREA/ FSI (M2)	TENEMENT (NOS) UNIT	TENEMENT (NOS) PROP.	CAR (NOS) BY RULE	CAR (NOS) PROP.	SCOOTER (NOS.) BY RULE	SCOOTER (NOS.) PROP.
RESIDENTIAL	0-30	2	0	0	0	2	0
	30-40	2	0	1	0	2	0
	40-80	2	0	1	0	2	0
	80-150	1	154	1	154	1	154
	> 150	1	7	2	14	1	7
TOTAL	REQUIRED	-	161	-	168	-	161
TOTAL	PROPOSED	-	161	-	168	-	161

CLAUSE NO:-8.1.1 (V) PAGE NO 156
COMPOSITE PARKING:-ALSO, SIX SCOOTERS PARKING MAY BE ALLOWED TO BE CONVERTED IN ONE CAR PARKING.
6 SC = 1 CAR 161 X 1 / 6 = 161 / 6 = 27 CAR
161 SC = ??

TOTAL REQUIRED CAR PARKING = 168 + 27 = 195 NOS
ADD VISITOR PARKING 5% = 195 X 5% = 10 CAR
TOTAL REQUIRED PARKING + VISITOR PARKING = 195 + 10 = 205 CAR
TOTAL PROPOSED CAR PARKING = 307 NOS
CAR AREA = 307 X 12.50=3837.50 SQ.M.
TOTAL =3837.50 SQ.M.

TOWER-4
PARKING CALCULATION-RESIDENTIAL (As updated upto 30th January,2025)

TYPE	CARPET AREA/ FSI (M2)	TENEMENT (NOS) UNIT	TENEMENT (NOS) PROP.	CAR (NOS) BY RULE	CAR (NOS) PROP.	SCOOTER (NOS.) BY RULE	SCOOTER (NOS.) PROP.
RESIDENTIAL	0-30	2	0	0	0	2	0
	30-40	2	0	1	0	2	0
	40-80	2	0	1	0	2	0
	80-150	1	154	1	154	1	154
	> 150	1	7	2	14	1	7
TOTAL	REQUIRED	-	161	-	168	-	161
TOTAL	PROPOSED	-	161	-	168	-	161

CLAUSE NO:-8.1.1 (V) PAGE NO 156
COMPOSITE PARKING:-ALSO, SIX SCOOTERS PARKING MAY BE ALLOWED TO BE CONVERTED IN ONE CAR PARKING.
6 SC = 1 CAR 161 X 1 / 6 = 161 / 6 = 27 CAR
161 SC = ??

TOTAL REQUIRED CAR PARKING = 168 + 27 = 195 NOS
ADD VISITOR PARKING 5% = 195 X 5% = 10 CAR
TOTAL REQUIRED PARKING + VISITOR PARKING = 195 + 10 = 205 CAR
TOTAL PROPOSED CAR PARKING = 307 NOS
CAR AREA = 307 X 12.50=3837.50 SQ.M.
TOTAL =3837.50 SQ.M.

TOWER-5
PARKING CALCULATION-RESIDENTIAL (As updated upto 30th January,2025)

TYPE	CARPET AREA/ FSI (M2)	TENEMENT (NOS) UNIT	TENEMENT (NOS) PROP.	CAR (NOS) BY RULE	CAR (NOS) PROP.	SCOOTER (NOS.) BY RULE	SCOOTER (NOS.) PROP.
RESIDENTIAL	0-30	2	0	0	0	2	0
	30-40	2	0	1	0	2	0
	40-80	2	0	1	0	2	0
	80-150	1	90	1	90	1	90
	> 150	1	4	2	8	1	4
TOTAL	REQUIRED	-	94	-	98	-	94
TOTAL	PROPOSED	-	94	-	98	-	94

CLAUSE NO:-8.1.1 (V) PAGE NO 156
COMPOSITE PARKING:-ALSO, SIX SCOOTERS PARKING MAY BE ALLOWED TO BE CONVERTED IN ONE CAR PARKING.
6 SC = 1 CAR 94 X 1 / 6 = 94 / 6 = 16 CAR
94 SC = ??

TOTAL REQUIRED CAR PARKING = 94 + 16 = 110 NOS
ADD VISITOR PARKING 5% = 110 X 5% = 6 CAR
TOTAL REQUIRED PARKING + VISITOR PARKING = 110 + 6 = 116 CAR
TOTAL PROPOSED CAR PARKING = 174 NOS
CAR AREA = 174 X 12.50=2175.00 SQ.M.
TOTAL =2175.00 SQ.M.

TOWER-7
PARKING CALCULATION-RESIDENTIAL (As updated upto 30th January,2025)

TYPE	CARPET AREA/ FSI (M2)	TENEMENT (NOS) UNIT	TENEMENT (NOS) PROP.	CAR (NOS) BY RULE	CAR (NOS) PROP.	SCOOTER (NOS.) BY RULE	SCOOTER (NOS.) PROP.
RESIDENTIAL	0-30	2	0	0	0	2	0
	30-40	2	0	1	0	2	0
	40-80	2	0	1	0	2	0
	80-150	1	98	1	98	1	98
	> 150	1	0	2	0	1	0
TOTAL	REQUIRED	-	98	-	98	-	98
TOTAL	PROPOSED	-	98	-	98	-	98

CLAUSE NO:-8.1.1 (V) PAGE NO 156
COMPOSITE PARKING:-ALSO, SIX SCOOTERS PARKING MAY BE ALLOWED TO BE CONVERTED IN ONE CAR PARKING.
6 SC = 1 CAR 98 X 1 / 6 = 98 / 6 = 16 CAR
98 SC = ??

TOTAL REQUIRED CAR PARKING = 98 + 16 = 114 NOS
ADD VISITOR PARKING 5% = 114 X 5% = 6 = 6 CAR
TOTAL REQUIRED PARKING + VISITOR PARKING = 114 + 6 = 120 CAR
TOTAL PROPOSED CAR PARKING = 180 NOS
CAR AREA = 180 X 12.50=2250.00 SQ.M.
TOTAL =2250.00 SQ.M.

MHADA
PARKING CALCULATION-RESIDENTIAL (As updated upto 30th January,2025)

TYPE	CARPET AREA/ FSI (M2)	TENEMENT (NOS) UNIT	TENEMENT (NOS) PROP.	CAR (NOS) BY RULE	CAR (NOS) PROP.	SCOOTER (NOS.) BY RULE	SCOOTER (NOS.) PROP.
RESIDENTIAL	0-30	2	198	0	0	2	198
	30-40	2	0	1	0	2	0
	40-80	2	0	1	0	2	0
	80-150	1	0	1	0	1	0
	> 150	1	0	2	0	1	0
TOTAL	REQUIRED	-	198	-	0	-	198
TOTAL	PROPOSED	-	198	-	0	-	222

SCOOTER AREA=222 X 2.0=444.00 SQ.M.
TOTAL =444.00 SQ.M.


ALL TOWER - PARKING STATEMENT

	REQUIRED CAR PARKING	PROPOSED CAR PARKING
TOWER-3	205	307
TOWER-4	205	307
TOWER-5	116	174
TOWER-6	267	401
TOWER-7	120	180
MHADA	---	---
TOTAL-	913	1369

ALL TOWER - WATER REQUIREMENT

	OVER HEAD WATER TANK	ADD FIRE FIGHTING	ADD FIRE FIGHTING AT 65.00 M.	TOTAL OVER HEAD WATER TANK	TOTAL UNDER GROUND WATER TANK
TOWER-3	60,375.00 Lit.	20,000.00 Lit.	1,00,000.00 Lit.	1,80,375.00 Lit.	1,36,500.00 Lit.
TOWER-4	60,375.00 Lit.	20,000.00 Lit.	1,00,000.00 Lit.	1,80,375.00 Lit.	1,36,500.00 Lit.
TOWER-5	60,375.00 Lit.	20,000.00 Lit.	1,00,000.00 Lit.	1,80,375.00 Lit.	1,36,500.00 Lit.
TOWER-7	63,000.00 Lit.	20,000.00 Lit.	1,00,000.00 Lit.	1,83,000.00 Lit.	1,36,500.00 Lit.
MHADA	74,000.00 Lit.	20,000.00 Lit.	---	94,000.00 Lit.	1,61,500.00 Lit.
TOTAL-	3,18,125.00 Lit.	1,00,000.00 Lit.	4,00,000.00 Lit.	8,18,125.00 Lit.	7,07,500.00 Lit.

TREE CALCULATION
PLOT AREA-37,921.74X1/80 =474.02 =SAY-474 NOS
REQUIRED TREE= 474 NOS
PROPOSED TREE= 476 NOS




AMENITY SPACE-1 AREA KEY PLAN
(SCALE:-1:1000)

AMENITY SPACE-1 AREA CALCULATION Δ METHOD

1	0.50	51.89	X	22.914	=	594.50 SQ.M.
2	0.50	51.89	X	22.91	=	594.40 SQ.M.
				TOTAL	=	1188.90 SQ.M.


TOTAL AMENITY SPACE AREA
1188.90+806.98=1995.88 SQ.M.



AMENITY SPACE-2 AREA KEY PLAN
(SCALE:-1:1000)

AMENITY SPACE-1 AREA CALCULATION Δ METHOD


1	0.50	47.33	X	18.76	=	443.96 SQ.M.
2	0.50	47.33	X	15.34	=	363.02 SQ.M.
				TOTAL	=	806.98 SQ.M.



12.0M.WIDE INTERNAL ROAD AREA KEY PLAN
(SCALE:-1:500)

12.0M.WIDE INTERNAL ROAD AREA CALCULATION Δ METHOD

1	0.50	26.998	X	10.81	=	145.92 SQ.M.
2	0.50	26.998	X	10.75	=	145.11 SQ.M.
				TOTAL	=	291.04 SQ.M.

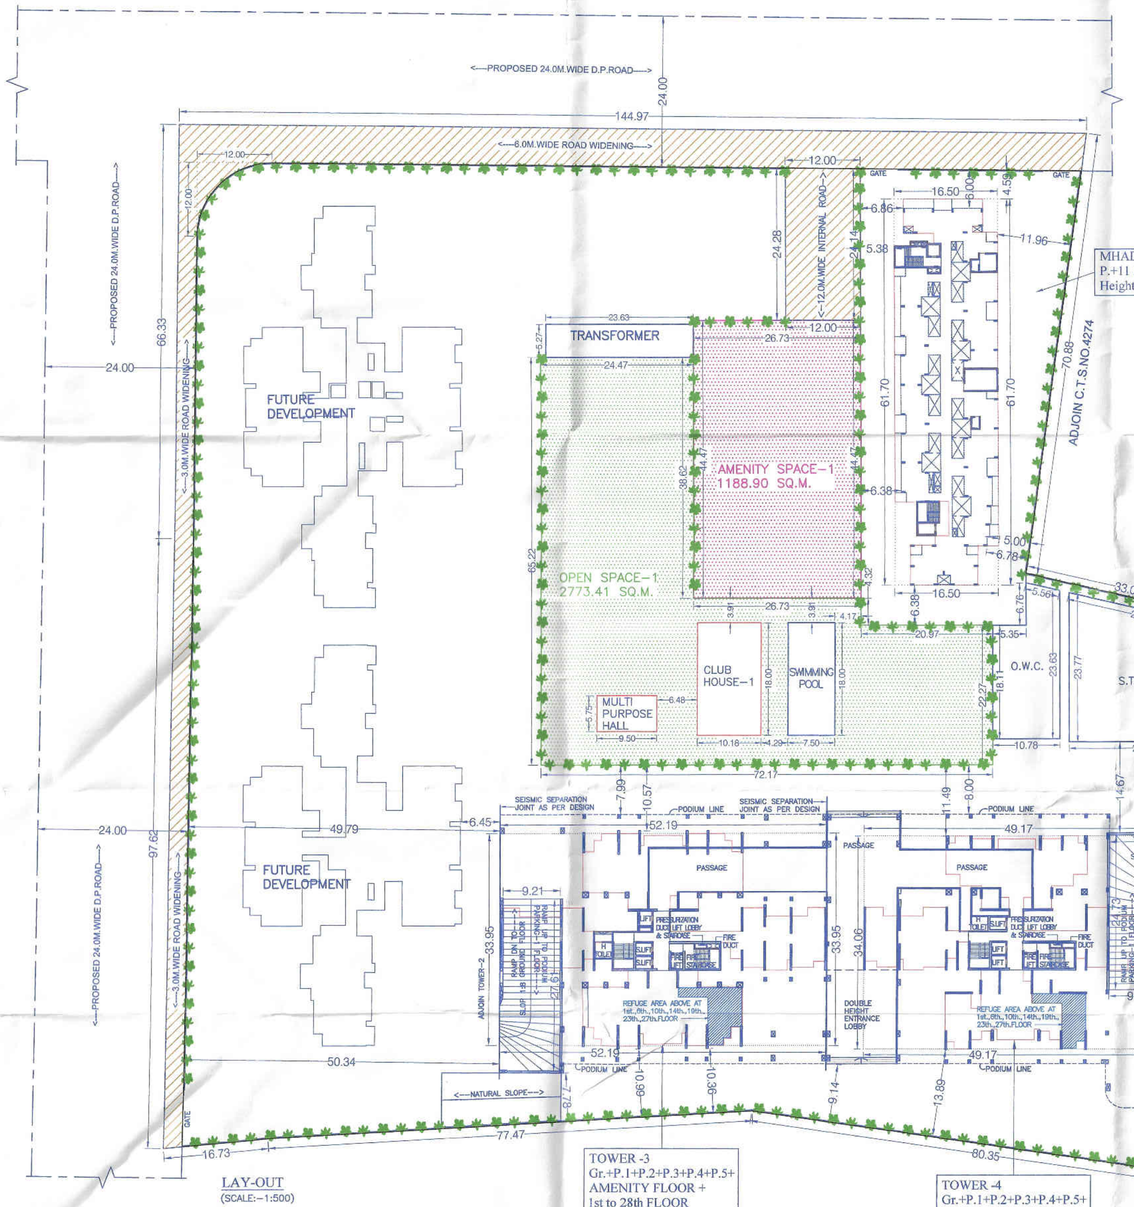

LAY-OUT
(SCALE:-1:500)


TOWER -3
Gr.+P.1+P.2+P.3+P.4+P.5+
AMENITY FLOOR +
1st to 28th FLOOR
Height-116.05 M.

TOWER -4
Gr.+P.1+P.2+P.3+P.4+P.5+
AMENITY FLOOR +
1st to 28th FLOOR
Height-116.05 M.

TOWER -5
Gr.+P.1+P.2+P.3+P.4+P.5+
AMENITY FLOOR +
1st to 17th FLOOR
Height-80.30 M.

TOWER -6
Gr.+P.1+P.2+P.3+P.4+P.5
FLOOR Ht-20.55 M.

TOWER -7
Gr.+P.1+P.2+P.3+P.4+P.5+
AMENITY FLOOR +
1st to 19th FLOOR
Height-83.50 M.




OPEN SPACE-1 AREA KEY PLAN
(SCALE:-1:1000)

OPEN SPACE-1 AREA CALCULATION Δ METHOD

1	0.50	45.72	X	20.67	=	472.52 SQ.M.
2	0.50	45.72	X	20.67	=	472.52 SQ.M.
3	0.50	57.70	X	23.60	=	680.86 SQ.M.
4	0.50	57.70	X	23.595	=	680.72 SQ.M.
5	0.50	30.59	X	15.26	=	233.40 SQ.M.
6	0.50	30.59	X	15.26	=	233.40 SQ.M.
				TOTAL	=	2773.41 SQ.M.

TOTAL OPEN SPACE AREA
2773.41+4158.60=6932.01 SQ.M.

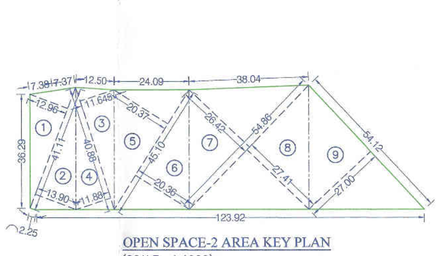


OPEN SPACE-2 AREA KEY PLAN
(SCALE:-1:1000)

OPEN SPACE-2 AREA CALCULATION Δ METHOD

1	0.50	41.11	X	12.96	=	266.39 SQ.M.
2	0.50	41.11	X	13.90	=	285.71 SQ.M.
3	0.50	40.88	X	11.645	=	238.02 SQ.M.
4	0.50	40.88	X	11.88	=	242.83 SQ.M.
5	0.50	45.10	X	20.37	=	459.34 SQ.M.
6	0.50	45.10	X	20.36	=	459.12 SQ.M.
7	0.50	54.86	X	26.42	=	724.70 SQ.M.
8	0.50	54.86	X	27.41	=	751.86 SQ.M.
9	0.50	54.12	X	27.00	=	730.62 SQ.M.
				TOTAL	=	4158.60 SQ.M.

TOTAL OPEN SPACE AREA
2773.41+4158.60=6932.01 SQ.M.

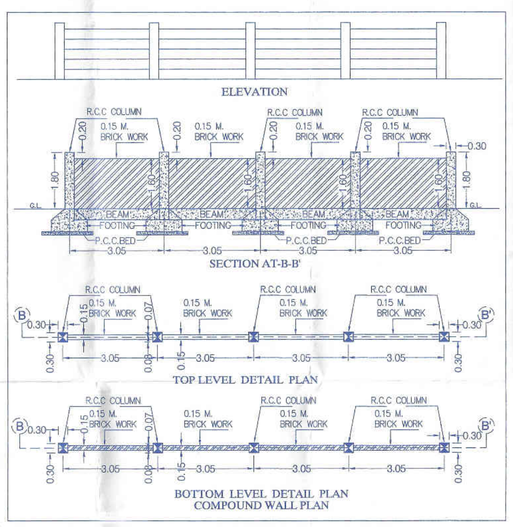

NORTH

PROPOSED RESIDENTIAL BUILDING AT S.NO.207/1/1(P), C.T.S. NO.4274,4300,4301(P)+S.NO.208/1A/1,208/1A/2, 208/1A/3/1(P),C.T.S.NO.4301,4302,4303,4271,4272, 4273(P),VILLAGE:-HADAPSAR,TAL.HAVELI,DIST.PUNE. — Drawing sheet no: 1/69

STAMPS OF APPROVAL FOR PLANS:

			SQ.M.
A)	AREA STATEMENTS		
1	AREA OF PLOT (Minimum area of a,b,c to be considered)		41,349.67
	(a)	As per ownership documents(7/12, CTS extract)	42,172.00
	(b)	As per measurement sheet	41,802.17
2	DEDUCTION FOR:		
	(a)	Proposed D.P./D.P. Road widening Area/ Service Road/ Highway winding	1432.05
		i) Area Under 18.0M. Wide D.P.Road Widening	60.39
		ii) Area Under 24.0M. Wide D.P.Road Widening (868.87+210.01+292.78)	1371.66
	Total (a+b)		----
3	BALANCE AREA OF THE PLOT (1-2)		39,917.62
4	AMENITY SPACE (if Applicable)		
	(a)	Required 10%	1,995.88
	(b)	Adjustment of 2(b), if any	---
	(c)	Balanced Proposed	---
5	NET PLOT AREA (3-4(c)		37,921.74
6	RECREATION OPEN SPACE (if Applicable)		
	(a)	Required (39,917.62X10%)	3,991.76
	(b)	Proposed	6,932.01
7	12.0 M.Wide Internal Road Area		291.04
8	Plotable Area (if Applicable)		37,921.74
9	Built up area with refrence to Basic F.S.I. as per front road (Sr.No.05xbasic FSI) (37,921.74x1.10=41,713.91 sq.m.)		41,713.91
10	Addition of FSI on payment of premium		---
	(a)	Maximum permissible premium FSI --based on road width/TOD zone. (41,349.67X0.50)	20,674.84
	(b)	Proposed FSI on payment of premium	---
	(c)	Total payment of premium (b+c)	---
11	in-situ FSI / TDR loading		
	(a)	In-situ area against D.P./R.P.road [2.0xSr.No.2(a)] if any (1,371.66X2.0)	2,743.32
	(b)	In-situ area against Amenity Space if handed over [2.00 or 1.85 x Sr.No. 4(b) and/or (c)]	---
	(c)	TDR area (41,349.67X1.15=47,552.12 SQ.M.)	---
	T.D.R. AREA	Regular T.D.R.- 30% SLUM T.D.R.-	---
	(d)	Total in-situ/TDR loading proposed (11(a)+(b)+(c))	---
12	IGBC area 5%(Green Building Area)of Sr.No.9 (41,713.91X5%=2085.70 SQ.M.)		2,085.70
13	Total entitlement of FSI in the proposal		
	(a)	[9+10(b)+11(d)] or 12 whichever is applicable	46,542.93
	(b)	Ancillary Area FSI (upto 60% OR 80% with payment of charges) (46,542.93X0.60=27,925.76 SQ.M.)	27,925.76
	(c)	Taken In Ancillary in Previous Sanction	16,546.55
	(d)	Proposed Ancillary	11,352.40
	(e)	Total Ancillary (13c+13d)	27,898.95
	(f)	Total entitlement (13a+13e)	74,441.88
14	Maximum utilization limit of FSI (building potential) Permissible as per Road width {(as per Regulation No. 6.1 or 6.2 or 6.3 or 6.4 as applicable)x 1.6 or 1.8}		---
15	Total Built up area in proposal (excluding area at Sr.No. 17b)		---
	(a)	Existing Built up area	---
	(b)	Proposed Built up area (As per 'P-line')	74,441.88
	(c)	Total (a+b)	74,441.88
16	FSI Consumed (15/13) (should not be more than Sr. no. 14 above)		0.999
17	Area for inclusive Housing, if any		
	(a)	Required (20% of Sr.no.9) (41,713.91X0.20)	8,342.78
	(b)	Proposed	8,368.13

AREA OF THE PLOT 16200 Sq Mtrs. (Ref. Decl in other TECH TAB)

CERTIFICATE OF AREA

CERTIFIED THAT THE PLOT UNDER REFERENCE WAS SURVEYED BY ME ON AND THE DIMENSION OF SIDES, ETC. OF PLOT STATED ON PLAN ARE AS MEASURED ON SITE AND THE AREA SO WORKED OUT TALLIES WITH THE AREA STATED IN DOCUMENT OF OWNERSHIP / I-H SCHEME RECORD / LAND RECORD DEPT. / CITY SURVEYED RECORDS.

SIGN. OF ARCHITECT
CA/2004/34113

OWNER'S DECLARATION

I/WE UNDERSIGNED HERE BY CONFIRM THAT I/WE WOULD ABIDE BY PLANS APPROVED BY AUTHORITY/COLLECTOR. I/WE WOULD EXECUTE THE STRUCTURE AS PER APPROVED PLANS.ALSO I/WE WOULD EXECUTE THE WORK UNDER SUPERVISION OF PROPER TECHNICAL PERSON SO AS TO ENSURE THE QUALITY AND SAFETY AT THE WORK SITE.

OWNER'S NAME AND SIGNATURE

SHRI. VIRAJ PRAMOD TUPE

PROJECT:-Building Proposal
S.NO.207/1/1(P),C.T.S. NO.4274+4300+4301(P)+ S.NO.208/1A/1(P)+208/1A/2+208/1A/3/1(P), C.T.S. NO.4301+4302+4303+4271+4272+4273(P)

HISSA NO: FINAL PLOT NO: PLOT NO:
PETH: VILLAGE:-HADAPSAR,TAL.HAVELI, DIST.-PUNE

ARCHITECT: SWAPNIL PRAKASHRAO KSHIRSAGAR — ARCHITECT'S SIGN

801,T2,MONTREAL BUSINESS CENTER, S.NO.272, PALLOD FARMS, OFF.BANER ROAD,PUNE-411045

JOB NO	DRG.NO	SCALE	DRAWN BY	CHECKED BY	REGISTRATION NO OF ARCHITECT
		1:100			CA/2004/34113